

EN Digital weekly time switch module, ideally suited for daily different programs and time controls.

» Up to 20 different ON/OFF switching operations possible every day or some certain days per week. Also include a countdown function: delay time ON and OFF.

» Easy-to-use programming via keys for configure operation and day of the week, hours, minute.

» Can be set different working mode of automatic (AUTO, ON AUTO and OFF AUTO) or forced ON/OFF operation.

» Fitted with a replaceable battery 3V (CR2032) to keep the settings more than a year.

» Complies with CE and other safety standards.

ES Interruptor horario digital con programación diaria o semanal.

» Configuración sencilla que permite una programación diferente para uno de los siete días de la semana.

» Sus 20 operaciones de apertura y 20 de cierre a distintas horas conforman un total de hasta 40 operaciones distintas a lo largo del día.

» Puede actuar como contador a ON o a OFF.

» Puede funcionar tanto en modo programa (automático) o activación forzada.

» Batería interna de fácil sustitución para mantener la programación sin alimentación.

» Cumplimiento con el Marcado CE.

Available models

Reference	Input	Output
MWTI230R1	24-265VAC/VDC	1 relay, 10A (50-60Hz) /10A 24VDC


Modelos disponibles

Referencia	Entrada	Salida
MWTI230R1	24-265VAC/VDC	1 relé, 10A 250VAC /10 24VDC

Nominal values & details


Input (Entrada)	24-265 VAC (50-60Hz) /24-265 VDC
Max. switching current (Intensidad máxima)	10A
Power dissipation (Potencia disipada)	≤4VA (≤ 5Watt)
Contact type (Tipo de contacto)	1NO / 1NC
Timing control range (Escala de tiempo)	1min~168h
Timing error (Error máximo)	± 2s/day
Minimum range (Intervalo mínimo)	1min
Working time (Temperatura de trabajo)	-10°C ~50°C
Operating humidity (Humedad de trabajo)	<95%
Battery	3V button battery (CR2032)
Weight (Peso)	75gr(2,65Oz)
Mounting (Montaje)	DIN-rail (35mm)

Dimensions mm (Dimensiones)

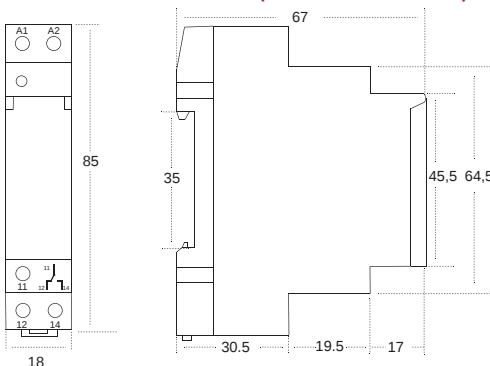

MWTI230R1

Nomenclature


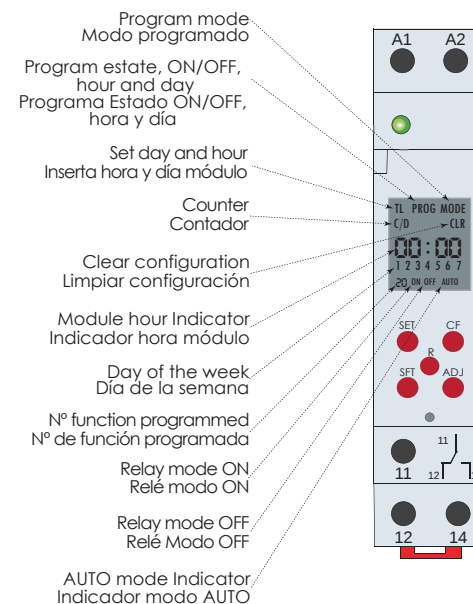


Nomenclatura

Button	Description
SET	Activate/deactivate main menu Activa/desactiva el menú principal
CF	In SETTING status, select the item to enter in the next menu. En modo configuración, selecciona para entrar en el menú
R	Reset the configuration to default factory. Restablece la configuración a los valores de fábrica.
SFT	Changes the submenu item selected to be set. Also it is a function key for de/activate COUNTDOWN ON*. Desplaza el selector de elementos del submenú. También activa y desactiva la función COUNTDOWN ON*
ADJ	Adjusts to the parameter to be set. Also it is a function key for de/activate COUNTDOWN OFF*. Modifica el parámetro que se está estableciendo. También activa y desactiva la función COUNTDOWN OFF*

Applications & Examples

Example 1: We need to control the boiler of an industry. The schedule is from Monday to Thursday from 8:00 to 16:15 except Friday that ends at 15:30.

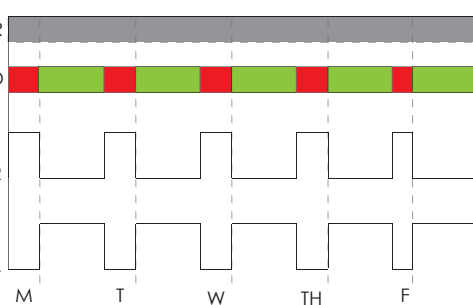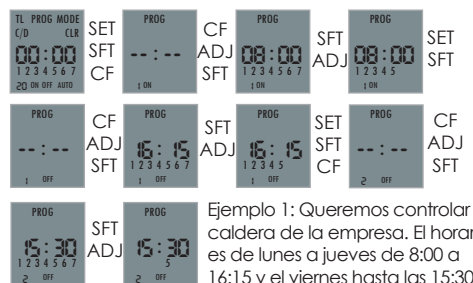

Applications & Examples

Example 2: We want to keep off an oven for 4 hours



Ejemplo 1: Queremos mantener apagado un horno durante 4 horas

